


RTDs and Thermistors


Speciality RTDs and Thermistors

Construction Styles


10 = 6 in. Adjustable Spring Style
11 = 12 in. Adjustable Spring Style

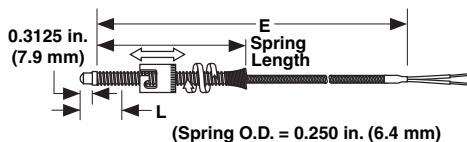


12 = Adjustable Armor Style

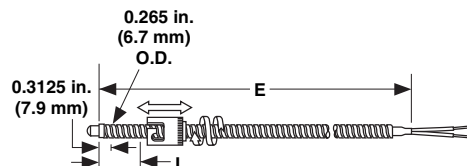


25 = Cartridge with Flange

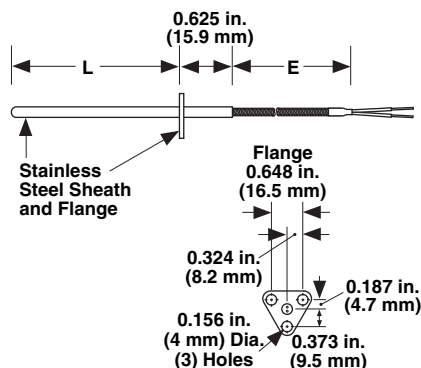


50 = Open Air

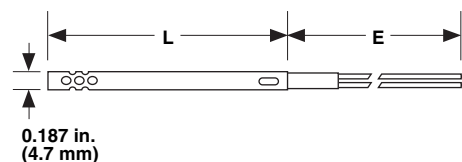

55 = Open Air with Flange

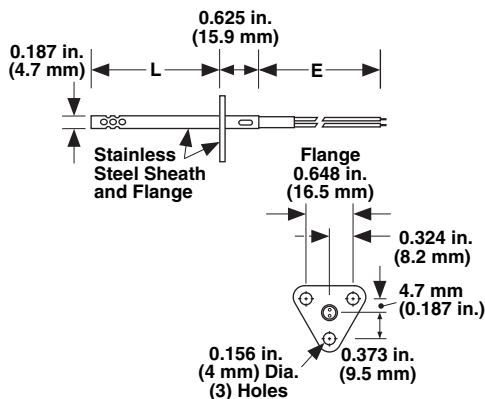

80 = Surface Mount

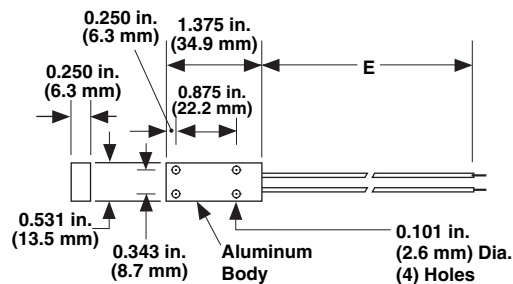

RTDs and Thermistors



See next page for Rapid Ship sensors and ordering instructions.