



European Union Declaration of Conformity

(in accordance with ISO/IEC 17050-1 and ISO/IEC 17050-2)

This is to certify that the product listed below, which was designed and manufactured by:

Watlow Electric Manufacturing Company

1241 Bundy Blvd.
Winona, MN 55987 USA

meets the essential safety requirement of the European Union, when properly installed, maintained and operated in the application for which it was designed. In addition, this is to certify that this product has also been designed and manufactured to ensure compliance with all applicable directives.

A Technical Documentation File is also available for review by competent authorities and will be maintained for a period of ten years after the date on which the product was last manufactured. In addition to this Technical File, one can find design, safety, installation, maintenance, and application related information about this product in the documentation that was shipped with product or on www.watlow.com.

This declaration of conformity is issued under the sole responsibility of the manufacturer for the product listed below.

Product Name: DIN-A-MITE® “B” Power Control
Watlow Part Number: DB (1, 2, 3, 4, 8 or 9) 0 – (02, 24 or 60)(CX, FX, K1, K2, K3) – (0 or S)(followed by any 3 letters or numbers) (where X = any number 0-9)
Product Description: Power Control, Installation Category III, Pollution degree 2, IP20.
Rated Supply: 24 to 600 V~ (ac), 50/60 Hz
Rated Power: See Derating curve 30 Amps at 50°C.

We, as the manufacturer, hereby declare that the products described above are in conformity with the applicable requirements in accordance with the following European Directives:

Applicable Directives: 2014/35/EU (Low Voltage “Safety” Directive)
2014/30/EU (Electromagnetic Compatibility “EMC” Directive)
2011/65/EU as amended by EU 2015/863 (RoHS Directives)
2012/19/EU (WEEE Directive)

The object of the declarations described above is in conformity with the relevant Union harmonization legislation:

Applicable Standards:

Safety: EN 60947-1 2007/A1 2011/ A2 2014 Low voltage switchgear and controlgear
EN 60947-4-3:2014 Part 4-3: Contactors and motor-starters – Semiconductor controllers and semiconductor contactors for non-motor loads.

EMC: EN 61326-1:2013 Electrical equipment for measurement, control and laboratory use – EMC requirements Industrial Immunity Table 2 levels.
EN 55011:2016/A1:2017/A11:2020 Emissions Industrial, Scientific, Medical equipment, Group 1 RF not intentionally generated, Class A¹ Industrial Emissions
IEC 61000-4-2:2008 Electrostatic discharge immunity
IEC 61000-4-3:2007 +A1/2008, A2/2010 Radiated, radio-frequency electromagnetic field

Any questions relating to this declaration or the conformity of the product(s) covered by this declaration should be directed, in writing, to either the European or Company Authorized Representative noted on this declaration.

EMC (Cont'd): immunity 10V/M 80–1000 MHz, 3 V/M 1.4–2.7 GHz
IEC 61000-4-4:2012 Electrical fast-transient / burst immunity
IEC 61000-4-5:2014 +A1/2017 Surge immunity
IEC 61000-4-6:2013 + Corrigendum 2015 Immunity to conducted disturbances induced by radio-frequency fields
IEC 61000-4-11:2020 Voltage dips, short interruptions and voltage variations immunity
EN 61000-3-2:2014 Limits for harmonic current emissions for equipment ≤ 16 Amps per phase
EN 61000-3-3²:2013 Voltage fluctuations and flicker ≤ 16 Amps per phase

WEEE: Electronic Equipment Assembly, Consult sales office or factory for information on proper recycling methods. Case plastics are Polycarbonate. Connectors Nylon.

Environmental: **EN IEC 63000³:2018-** Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances (RoHS) 10 of 10 with exemptions below.

Notes:

- 1) CAUTION: This equipment not intended for use in residential or commercial environments and may not provide adequate protection to radio reception in such environments without additional filtering. Conducted emissions over 6 amps will require use of Watlow 14-0019 or Crydom 1F25 filter or Watlow 14-0020 or Crydom 3F20. Tank filters may suppress desirable communications carried on power lines in the 150 to 250 KHz region. The filters may suppress carrier current such as that used for infant monitors and medical alert systems. Verify that suppressed carrier current or other desirable communications on power lines creates no hazard to people or property.
- 2) Cycle time may need to be extended up to 175 seconds to meet flicker requirements depending on load current and switching method and source impedance.
- 3) RoHS compliance of some components used within product is via the following exemptions
6 c) Copper alloy containing up to 4 % lead by weight (terminals)
7 a) Lead in high melting point solders internal to components
7 c) -i Lead in glass in ceramic internal to components

European Authorized Representative:

Mr. Martin Wallinger
Watlow Plasmatech GmbH
Brennhoflehen-Kellau 156
5431, Kuehl, Austria

Implementation Date:


January 27th, 2023

Place of Issue:



Winona, MN USA

Company Authorized Representative:

Jeff Harrington

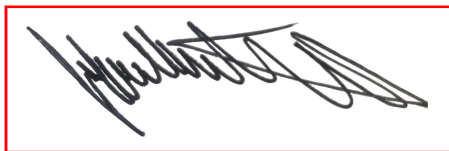

Director of Operations
Watlow Electric Manufacturing Company
1241 Bundy Blvd.
Winona, MN 55987 USA



Any questions relating to this declaration or the conformity of the product(s) covered by this declaration should be directed, in writing, to either the European or Company Authorized Representative noted on this declaration.