
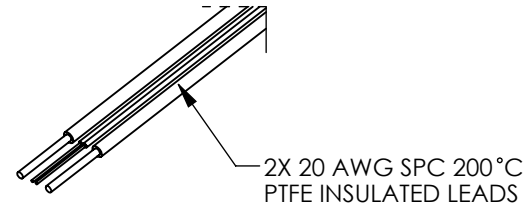
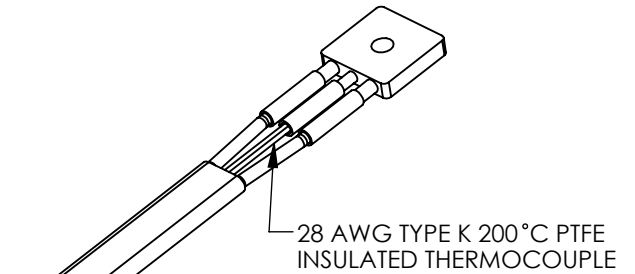
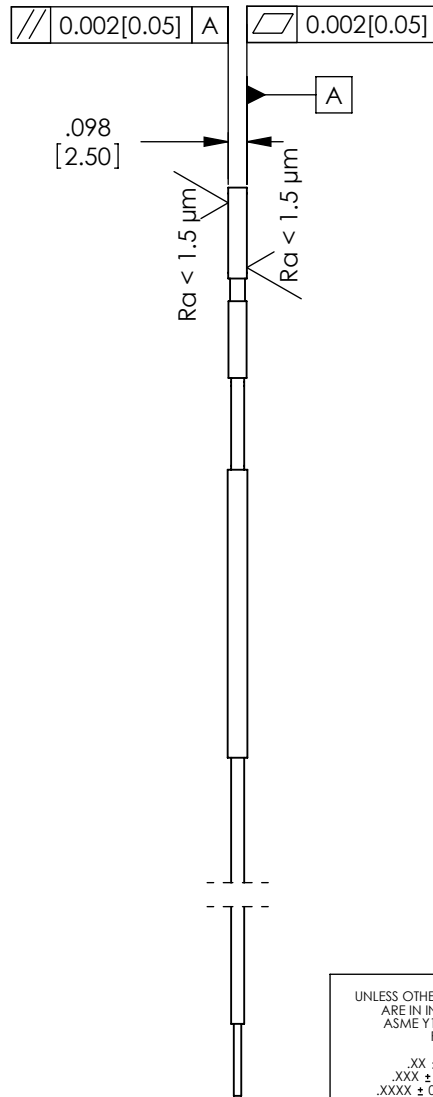


REVISION HISTORY				
REV.	ECO#	DESCRIPTION	DATE	BY
.		ORIGINAL RELEASE	08/27/2012	AVS

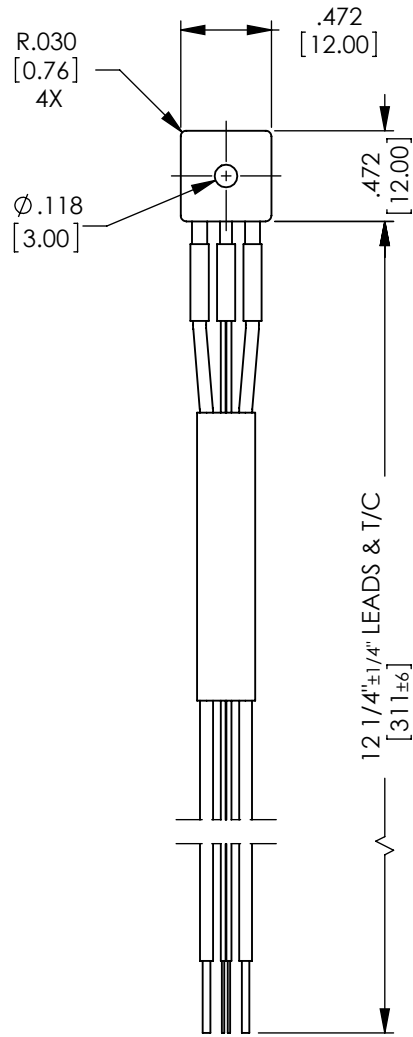

- NOTES:
1. VOLTAGE: 24 VOLTS
  2. POWER: 100 WATTS (NOMINAL) AT 25°C.
  3. RESISTANCE: 5.76 ± 1.44 OHMS AT 25°C.
  4. TCR: .00150 ± .00025 / °C.
  5. MAXIMUM TEMPERATURE: 400°C.

<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES &amp; [MILLIMETERS] PER ASME Y14.5M-1994. TOLERANCES: FRACTIONS ±1/16" X ±0.1" .XX ± 0.01" &amp; [.X] ± 0.3mm .XXX ± 0.005" &amp; [.XX] ± 0.13mm .XXXX ± 0.0005" &amp; [XXX] ± 0.013mm ANGLES ±0.5°</small>	DWN:	AVS	08/27/2012		12001 Lackland Road St. Louis, MO 63146 PHONE 314-878-4600 FAX 314-878-6814
	CHK:				
	ENG:				
	MFG:				
<small>CONFIDENTIAL: This drawing and all information associated therewith may contain the confidential information of Watlow, or its customers or suppliers, which is subject to patent, trademark, copyright, or trade secret protection. Neither this drawing or the information associated therewith should be reproduced, used, or disclosed to others without the prior written permission of Watlow. Copyright 2004 Watlow Electric Manufacturing Co. All rights reserved.</small>	QA:			<b>TITLE</b> ULTRAMIC 600 ADVANCED CERAMIC HEATER CUSTOMER	
	PUR:				
	 THIRD ANGLE PROJECTION				
	CAD/REF. NO.	CER-1-01-00540	SCALE		1:1
FINISH				SIZE	A
MATERIAL	AIN			DWG. NO.	CER-1-01-00540-CUSTOMER
CUSTOMER	WATLOW SALES			WEIGHT	
				SHEET	1 OF 1