

D4TTM 1/4 DIN

The D4T™ data logger offers a wide range of field removable I/O modules for maximum design flexibility. Configurations can be custom tailored to meet the scaling needs of a tremendous range of equipment and applications while providing exactly the hardware types required for compatibility. The D4T data logger also features a 4.3 inch, color, graphical touch panel. Combining power, flexibility and functionality, this new data logger offers unmatched versatility, and its best-in-class ease of use could very well make user manuals a thing of the past.

Watlow's D4T is available through Watlow **SELECT®**, a program that enables you to quickly identify, configure and receive your thermal products faster and easier than ever before. With **SELECT**, you use a variety of tools to guide your decision, configure products for an exact fit and quickly receive your order.

Features and Benefits

4.3-inch, color touch panel with high-resolution, graphical user-interface

- Shortens learning curve and reduces operator errors
- Allows channels, alarms, inputs and outputs to be personalized with user defined names
- Intuitive screens layout and menu navigation
- Programmable to show information in multiple languages

Data logging

- Easily complies with regulatory standards with ability to choose encrypted, .CSV or both types of file formats for tamper proof record needs
- Enables security using lock-out security levels for different user groups
- Simplifies record keeping management with ability to archive records to the cloud or a connected PC network
- Flexibility to select which parameters to log from one to up to 128 points simultaneously
- Choose where you want to store the files—inside the controller, on a connected USB memory device, or to a connected PC anywhere in the world
- Record as fast as one time per 0.1 second or as slow as one time per hour

One to 24 channel data logger

- Scalable channels, pay for only what you need
- Compatible with temperature, altitude, humidity, ac current and other 0-10VDC or 0-20mA process units
- Flexibility to meet diverse process applications
- Field expandable channels and I/O if application needs grow in the future



Email and text alerts

 Notifies users of an event that has occurred such as an alarm condition or analog input error

Batch processing with bar code data entry

- Easily collects and manages data records
- Inputs information from bar code scan for fast and easy data entry
- Provides data security through password and data log encrypted file options
- Improves manufacturing robustness via reminder screens ensuring all data is entered during processing
- Helps ensure compliance with growing regulations and minimizes warranty exposure
- Eliminates part processing skips or walk arounds due to improved quality control
- Produces formatted data record report for easy receipt or record management uses

Modular design

- Adapts quickly to evolving requirements
- Offers numerous types of field pluggable modules for maximum flexibility and easiest compatibility
- Features scalable and modular firmware functions
- Delivers scalable input/output quantities from one to 24

Trend screens

- Create up to four unique trend graph screens
- Graph any input sensor or process value

COMPOSER® graphical configuration PC software

- Speeds up and simplifies commissioning
- Archives and documents controller setup
- Connects with controller easily via Ethernet

Many communications options available including EtherNet/IP™, Modbus® TCP (Ethernet) SCPI and EIA-232/485 Modbus® RTU

- Offers two USB host ports and one device port
- Simplifies file transfers
- Connects easily





D4T 1/4 **DIN**

Key Features and Options

- Ethernet Modbus® TCP connectivity
- Multiple high-speed USB host ports
- Universal, thermistor and ac current measurement inputs
- Inputs and outputs expandable from 1 to 24
- Programmable timers, counters, math and logic
- Temperature, altitude, relative humidity and Vaisala[®] humidity compensation
- USB configuration port
- Configuration settings can be stored and recalled
- Removable modules and connectors
- Front-panel mount and flush mounting options
- Right angle and front-screw terminal options
- UL® listed, CSA, CE, RoHS, W.E.E.E., FM
- Multi-language options
 - English, German, French, Italian, Spanish, Japanese, Korean and Chinese
- USB wired or wireless mouse user interface
 - Use in hazardous location, dirty environments or applications with gloves

Common Specifications

Line Voltage/Power

• Data retention upon power failure via nonvolatile memory

Functional Operating Range

- Type J: -346 to 2192°F (-210 to 1200°C)
- Type K: -454 to 2500°F (-270 to 1371°C)
- Type T: -454 to 750°F (-270 to 400°C)
- Type E: -454 to 1832°F (-270 to 1000°C)
- Type N: -454 to 2372°F (-270 to 1300°C)
- Type C: 32 to 4200°F (0 to 2315°C)
- Type D: 32 to 4200°F (0 to 2315°C)
- Type F: 32 to 2449°F (0 to 1343°C)
- Type R: -58 to 3214°F (-50 to 1767°C)
- Type S: -58 to 3214°F (-50 to 1767°C)
- Type B: 32 to 3300°F (0 to 1816°C)
- RTD (DIN): -328 to 1472°F (-200 to 800°C)
- Process: -1999 to 9999 units

Calibration Accuracy

- Calibration accuracy and sensor conformity: ±0.1% of span, ±1°C at the calibrated ambient temperature and rated line voltage
 - Types R, S, B: ±0.2%
 - Type T below -50°C: ±0.2%
- Calibration ambient temperature at 77°F ±5°F (25°C ±3°C)
- Accuracy span: 1000°F (540°C) min.
- Temperature stability: Typical ±0.1°F/°F (±0.1°C/°C) rise in ambient max.

Configuration Diagnostics

Indicates if modules present match the expected configuration settings

USB Host Port

- Total of 2 available
- Version: USB 2.0 hi-speed
- Connector: USB Type A, high-retention
- Flash drive must be FAT32 file system
- Max. current 0.5A/port

System Configuration Requirements

- D4T has 6 slots for flex modules (FM)
- EIA-232/485 Modbus® RTU flex module, if used, must occupy slot 6 location
- A maximum of two 10A SSR FM modules can be used in the F4T[®] and each will require space for 2 slots. Valid in slots 1, 2, 4 or 5

Wiring Termination - Touch-Safe Terminals

- Right-angle and front-screw terminal blocks for input, output and power supply connections
- Input, output and power terminals: Touch safe, removable, 12 to 30 AWG

D4T Base Specifications

Line Voltage/Power

- High voltage option: 100 to 240VAC +10/-15%, 50/60Hz ±5%
- Low voltage option: 24 to 28VAC/VDC+10/-15%, 50/60Hz ±5%
- Power consumption: 23 W, 54VA

User Interface

- 4.3 inch TFT PCAP color graphic touch screen
- LED backlife >50K hours
- 4 keys: Home, Main Menu, Back, Help
- Multiple languages
 - English, German, French, Italian, Spanish, Japanese, Korean and Chinese
- USB wired or wireless mouse functionality
 - Right click for 4 keys: Home, Main Menu, Back, Help

Environment

- NEMA 4X/IP65 front panel mount configuration only
- Operating temperature: 0 to 122°F (-18 to 50°C)
- Storage temperature: -40 to 185°F (-40 to 85°C)
- Relative humidity: 0 to 90%, non-condensing

Agency Approvals

- UL®/EN 61010 Listed, File E185611 QUYX
- UL® 508 Reviewed
- CSA CC.C#14, File 158031
- AMS 2750 E compliant: Analog input process values. Tip: Maximize field calibration accuracy and uniformity by using advanced F4T features such as Calibration Offset and Linearization Function Blocks. Refer to user manual for details
- RoHS by design, China RoHS Level 2, W.E.E.E.
- CF
- Windows[®] hardware certification



D4T 1/4 DIN

Inputs and Outputs

Input sampling: 10HzOutput update: 10Hz

Communications

- Modbus® TCP (Ethernet)
- EIA-232/485 Modbus® RTU
- Isolated communications

Data Logging

- User selectable parameters: Up to a maximum of 128 active parameters depending on configuration
- Logging interval: Programmable increments between 0.1 seconds and 60 minutes if logging to internal memory. Logging directly to USB; 1.0 seconds to 60 minutes
- File types: .CSV for standard data logging or proprietary format for encrypted data log option
- Storage: 80MB internal memory or to USB memory stick
- File transfer: Internal memory to USB host port or to Ethernet Modbus[®] TCP
- Transfer options: On demand by user or user programmable based on when a new data log file record is available. Utilizes TFTP and Samba protocols
- Record: Date and time stamped

Batch Processing with Bar Code Data Entry Via USB Scanner

- Compatible with many bar code types including Code 128, Code 39, Extended Code 39, Data Matrix, Interleaved 2 of 5, ISSN, SISAC, LOGMARS, QR, UCC/EAN-128 (GS1-128, UPC-A & E)
- Compatible with most USB scanner types such as Zebra DS4308, DS2208, LI2208 and LS2208
- USB port provides 500mA max. power supply for bar code scanner/base charging
- Display can show bar code fields up to a maximum length of 48 characters. Characters might wrap to 2 rows after 24 characters
- Program the bar code scanner to add an enter key (carriage return feed) at the end of each bar code data field sent to the F4T/D4T. Refer to USB scanner user manual

Trending

- 4 user programmable charts
- 6 pens available per chart
- View analog sensors and process values

Real Time Clock with Battery Backup

- Accuracy (typical): +/-3ppm over -15 to 50°C
- Typical battery life: 10 years at 77°F (25°C)
- Field replaceable lithium battery

Number of Function Blocks by Ordering Option

| Function Block | Basic | Set 1 | Set 2 |
|--|-------|-------|-------|
| Alarm | 6 | 8 | 14 |
| Compare | None | 4 | 16 |
| Counter | None | 4 | 16 |
| Linearization | 4 | 4 | 8 |
| Logic | None | 12 | 24 |
| Math | None | 12 | 24 |
| Process Value | 4 | 4 | 8 |
| Special Output Function (including compressor) | None | 2 | 4 |
| Timer | None | 6 | 16 |
| Variable | 4 | 12 | 24 |

Compare

 Greater than, less than, equal, not equal, greater than or equal, less than or equal

Counters

Counts up or down, loads predetermined value on load signal

Linearization

Interpolated or stepped

Logic

- And, nand, or, nor, equal, not equal, latch, flip-flop **Math**
- Average, process scale, switch over, deviation scale, differential (subtract), ratio (divide), add, multiply, absolute difference, minimum, maximum, square root, sample and hold, pressure-to-altitude and dew point

Process Value

 Sensor backup, average, crossover, wet bulb-dry bulb, switch over, differential (subtract), ratio (divide), add, multiply, absolute difference, minimum, maximum, square root, altitude, Vaisala® relative humidity and pressure-to-altitude

Special Output Function

 Compressor control (cool and/or dehumidify with single compressor), motorized valve, sequencer

Timers

• On pulse, delay, one shot or retentive


Variable

• User value for digital or analog variable




D4T ¹/₄ DIN

Panel Mount Dimensions

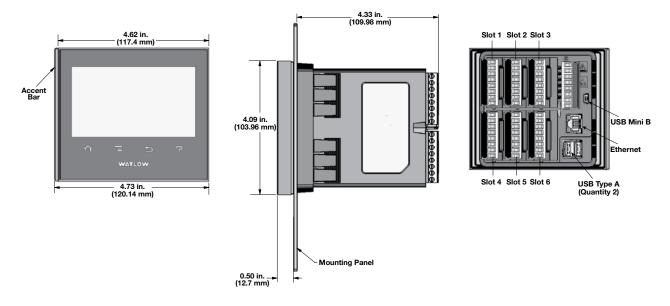

Flush Mount Dimensions

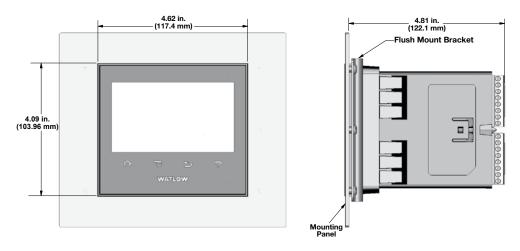



D4T 1/4 **DIN**

Ordering Information

Base includes: 4.3 inch color graphical touch screen, standard bus communications, Ethernet, Modbus® TCP and SCPI protocol.

Part Number

| 12 | 3 | 4 | 5 | 6 | 7 | 89 | 10 (1) | 12 | 13 14 | 15 |
|-------|----------|-------|--------------|---------------------|----------|---------|-------------------|---------|----------------|--------------------|
| | . | | Data | Pwr. Sup. Voltage, | | | Doc., Accent Bar, | | | Nbr. of Aux./Alarm |
| | | Appl. | Logging & | Conn. Style, Watlow | Function | Future | Replacement | | | Outputs, Digital |
| Model | туре | Type | Trend Charts | Logo Screenprint | Blocks | Options | Conn. & Custom | Options | Hardware Types | Inputs & Hardware |
| D4 | Т | | | | | AA | | 5 | | |

| 3 | Base Type |
|-----|---|
| T = | Touch screen |
| 4 | Application Type |
| 1 = | Standard |
| 5 | Data Logging and Trend Charts |
| J = | Data logging |
| K= | Data logging with encrypted files |
| L= | Data logging with graphical trend charts |
| M = | Data logging with encrypted files, graphical trend charts and batch processing with bar code data entry |

| | | | Supply Voltage, Connector S w Logo Screenprint | Style, |
|---|--------------|--------------------|---|----------------|
| | Power Supply | | Power Supply Connector | Watlow Logo |
| 1 | = | 100 to 240VAC | Right angle (standard) | Yes |
| 2 | = | 100 to 240VAC | Right angle (standard) | No |
| 3 | = | 100 to 240VAC | Front screw | Yes |
| 4 | = | 100 to 240VAC | Front screw | No |
| 5 | = | 24 to 28VAC or VDC | Right angle (standard) | Yes |
| 6 | = | 24 to 28VAC or VDC | Right angle (standard) | No |
| 7 | = | 24 to 28VAC or VDC | Front screw | Yes |
| 8 | = | 24 to 28VAC or VDC | Front screw | No |

| 7 | l l | Function Blocks | | | | | | | | |
|-----|-----------|-----------------|-------|--|--|--|--|--|--|--|
| | Basic Set | Set 1 | Set 2 | | | | | | | |
| A = | Χ | | | | | | | | | |
| B = | | X | | | | | | | | |
| C = | | | Х | | | | | | | |

89 **Future Options** AA = Future Options

| 10 11 | Documentation, Accent Bar, Replacement |
|-------|--|
| | Commontour 9 Creaters |

| | Connectors & Custom | | | | | | | | |
|------|---------------------|---------------|--|-------------|-------------|--|--|--|--|
| | Documentation | Decorate | Decorated Brush Aluminum Accent Bar | | | | | | |
| | DVD/QSG | Gray | Blue | Red | None | | | | |
| 1A = | Yes | X | | | | | | | |
| 1B= | Yes | | X | | | | | | |
| 1C= | Yes | | | Χ | | | | | |
| 1D= | Yes | | | | Χ | | | | |
| 1E = | No | X | | | | | | | |
| 1F = | No | | Х | | | | | | |
| 1G= | No | | | Χ | | | | | |
| 1H= | No | | | | Х | | | | |
| 1J = | Replacement conne | ectors only - | for the mod | el number e | ntered | | | | |
| XX = | Contact factory oth | ner custom-f | irmware, pre | set paramet | ers. locked | | | | |

| 12 | Additional Options |
|-----|--------------------|
| • | Additional Options |
| 5 = | None |

| | | | _ | | |
|---|--------|-----------------------------------|-----------|---------------------|------------------|
| | 13 (14 | Number of I | _ogging (| Channels & Input | Hardware Types |
| | Unive | ersal Input(s) | (T/C, RT | D 2- or 3-wire, 0- | 10VDC, 0-20mA) |
| | U1 = | 1 channel | , | , | <u> </u> |
| | U2 = | 2 channels | | | |
| | U3 = | 3 channels | | | |
| | U4 = | 4 channels | | | |
| | U5 = | 5 channels | | | |
| | U6 = | 6 channels | | | |
| | Ther | mistor Input(s | s) | | |
| | T1 = | 1 channel | | | |
| | T2 = | 2 channels | | | |
| | T3 = | 3 channels | | | |
| | T4 = | 4 channels | | | |
| | T5 = | 5 channels | | | |
| | T6 = | 6 channels | | | |
| | Unive | ersal Input(s) | (T/C, RT | D 2-wire, 0-10VD0 | C, 0-20mA) |
| | 04 = | 4 channels | | | |
| | = 80 | 8 channels | | | |
| | 12 = | 12 channels | | | |
| | | 16 channels | | | |
| | 20 = | 20 channels | | | |
| | | 24 channels | | | |
| | | mistor Input(s | s) | | |
| - | | 4 channels | | | |
| - | | 8 channels | | | |
| | | 12 channels | | | |
| | | 16 channels | | | |
| - | | 20 channels | | | |
| - | | 24 channels | | | |
| - | Cust | | | | |
| | XX = | Different chan factory for ass | | ity and combinatior | options. Contact |

(5) Number of Auxiliary/Alarm Outputs, Digital Inputs & Hardware

Options below are not available with 6 or 24 channel input models A = None

| Singl | e Output |
|-------|------------------------------|
| C = | 1 switched dc/open collector |

E = 1 mechanical relay 5A, Form C output F = 1 universal process/retransmit

Multiple Digital Inputs/Outputs

D = 6 digital I/O

P = 3 universal process/retransmit outputs
B = 3 mechanical relay 5A, 2 Form C and 1 Form A (Form A shares a common with 1 Form C)

J = 4 mechanical relay 5A, Form A
K = 2 SSRs Form A, 0.5A
T *= 2 SSRs at 10A

2 SSRs at 2A each, SSRs grouped in 2 pairs with each pair sharing a common

Communications

M = | Modbus® RTU 232/485

X = Different output quantity and combination options. Contact factory for assistance.

*Option "T" not available with digit 13 & 14, options U5, U6, T5, T6, 20, 24, TE and TF.



code, logo



RMA PLUS™ Remote Access Module

Watlow's RMA PLUS™ remote access module supports Watlow's powerful EZ-ZONE® RM temperature controller family by communicating with and providing access to all EZ-ZONE RM modules in a system.

EZ-ZONE RMA users have had to spend more time than desired to connect their entire system. Now the RMA PLUS offers standard state-of-the-art connectivity from the device to the entire system. Real-time communication is possible via a built-in Ethernet switch or USB. Users can also connect to third-party and legacy devices because the RMA PLUS acts as a gateway between Modbus® TCP and Modbus® RTU.

The device comes standard with a built-in managed Ethernet switch with two Ethernet jacks. Up to three Modbus® TCP sessions, three Watbus over Ethernet sessions and one Watbus over USB session is available in a single device. Users can also log up to 16 gigabytes of data standard or upgrade to a maximum of 32 gigabytes. Configuration and data logs are available as Windows® files so they can be easily accessed. In addition, discovery and transfer speeds have gone from minutes with the legacy EZ-ZONE RMA to just seconds with the RMA PLUS.

Because the RMA PLUS is an essential component of the EZ-ZONE RM family, users receive all the benefits and support of working with Watlow[®].

To view a comparison between the legacy EZ-ZONE RM Access Module and the new RMA Plus go to www.watlow.com/rmaplus.



Features and Benefits

Plug and play access to EZ-ZONE RM family

· Integrates easily into existing systems

Built-in Ethernet switch

- Eliminates the need to provide a switch for small systems
- · Offers port mirroring for troubleshooting
- Protects from broadcast and multicast storms

Integrated USB connection

- Provides easy connection from PC with no converter
- Ensures real-time communication from software packages

Modbus® TCP and Modbus® RTU

- Allows users to build tables based on individual needs
- Connects to third-party and legacy devices

Data logging

 Offers users the opportunity to log any data point in the system



RMA PLUS Remote Access Module

Specifications

(Select a RMA PLUS module for communication protocol options, data logging and system configuration).

Interoperable with:

- EZ-ZONE RM (C, E, H, L, S) version 9.0+ (high-speed Watbus)
- EZ-ZONE RM (A, C, E, H, L, S) (low-speed Watbus)
- EZ-ZONE PM, RUI, ST (low-speed Watbus)
- EZ-ZONE RM (F. G. UH. Z)
- POWERGLIDE®

Line Voltage/Power

- Power consumption: 4 W, 9VA
- Any external power supply used should comply with a Class 2 or SELV rating

Isolated Serial Communications

 All modules ship with standard bus protocol (Watbus) for configuration and communication connection to all EZ-ZONE products

Standard Communication

- Watbus over Ethernet (gateway to high-speed Watbus)
- Watbus over USB (gateway to high-speed Watbus)
- Watbus via Serial ('C' connector)
- Modbus® TCP

Additional Communication Options

- EIA-232/485, Modbus® RTU
- DeviceNet[™] (future option)
- EtherNet/IP™ (future option)

USB

- USB 2.0 device
- Mini USB connector type
- Recognized as a composite device: Vendor specific and mass storage classes
- USB host (future option)

Real Time Clock with Battery Backup

- Accuracy (typical): +/- 30ppm at 77°F (25°C)
- +30/-100ppm overtemperature operating range
- Battery type and typical lifetime rating: 10 years at 77°F (25°C)
- Lithium battery used, recycle properly

Data Logging

- Maximum of 2000 valid records
- Maximum of 500 unique data points per Watbus bus and zone
- File storage on embedded micro SD memory
- Comma separated value (.CSV) file type
- Access log files via USB device port

Memory Card

- Micro SDHC (4-32GB)
- 4GB class 4 SDHC on standard models (operating temperature: -25 to 85°C)
- 16GB class 10 SDHC on data log models (operating temperature: -40 to 85°C)
- -4 to 185°F (-20 to 85°C) ambient rating, non-volatile memory

Note: All module parameters are backed up in memory.



RMA PLUS Remote Access Module



Additional

Options

Ordering Information

Part Number

Module for communications, data logging and storage. Comes standard with Modbus® TCP, standard bus over Ethernet, USB device, internal storage and SD card

Wireless

Connectivity

Future

Option

| EZ-ZONE Rail Mount | Additional Communication Protocols | Ultra High Density Thermocouple Input Card | Data Logging | | | | | |
|---|---|--|-----------------|--|--|--|--|--|
| RMAP - | | | | | | | | |
| 5 A | dditional Communi | cation Protocols | | | | | | |
| A = None 2 = Modbus® F 5 = DeviceNet ^T | RTU 232/485 M (future option) | | | | | | | |
| 6 | Ultra High Density | T/C Input Card | | | | | | |
| | 1 = 18 T/C scanner inputs (future option) | | | | | | | |
| 7 | Data Logging | | | | | | | |
| A = None D = Data loggin | ng to 16G SD card | | | | | | | |

| | | Α | Α | | | |
|---------|------------------------|-----------|-------------|-------------|-----|--|
| 8 | | 1 | Wireless C | onnectiv | ity | |
| A = | None | | | | | |
| B = | Bluetooth ⁰ | ® (future | option) | | | |
| W = | Wi-Fi (futu | re option | 1) | | | |
| 9 | | | Future | Option | | |
| A = | Future opt | ion | | | | |
| 10 | | | Future | Option | | |
| A = | Future opt | ion | | | | |
| 11 (12) | | | Addition | al Options | S | |
| AA= | Standard | | | | | |
| XX = | Custom/lo | cked cod | de applicat | ion specifi | С | |
| | | | | | | |

Future

Option

